



Ka -band cavity (waveguide) filters




➤ Product Features

The product has high Q value, low insertion loss, rectangularity Advanced features, developed for the civilian market, debugging-free design It can be mass-produced by opening the mold, with low cost, one consistent high advantage.

High Q value, low loss; high consistency of batch production; low cost; meet the market demand of civilian and military products.

➤ Installation Diagram

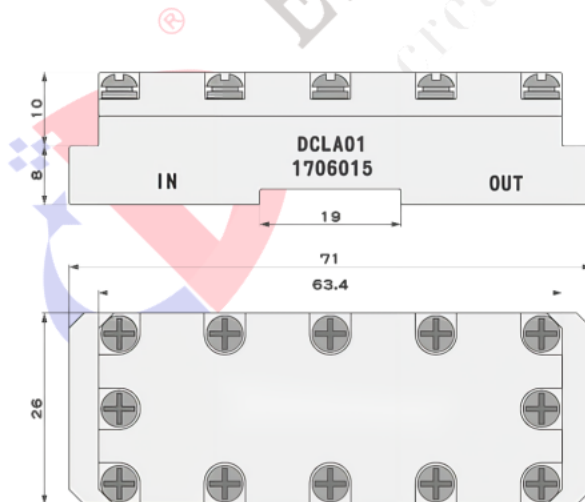



➤ Main Indicator Parameters

Parameter name	Typical value
Model	DCLA01-1706015
Input frequency	Ka-band
Insertion loss	1.0 dB
Bandwidth	2000MHz
out-of-band suppression	60 dB
Product size	71mm×26mm×18mm
Working temperature	-55℃~85℃
Custom Instructions Frequency range: above the Ka band Package can be customized as required	

